


These plug-in self-regulating heating cables are designed for residential and commercial (hazardous and non-hazardous) applications to create drainpaths needed to prevent icedams and ice build-up that can cause extensive damage to roof and gutter systems, without consuming excess energy.

Factory assembled with a standard three-prong plug, each cable can simply connect to any grounded 120V receptacle. Installation is easy, as the cable's self-regulating feature allows the heating cable to be overlapped on itself without risk of overheating and/or burnout.

PLUG-IN SELF-REGULATING HEAT

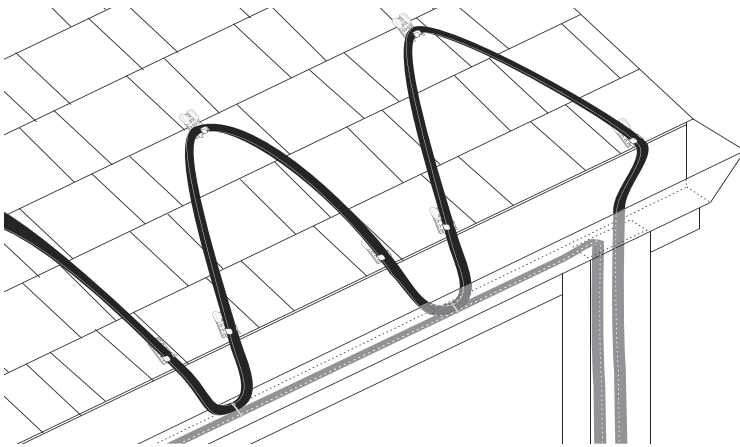

SAFETY INSTRUCTIONS

- Always disconnect and allow the heating cable to cool down prior to handling.
- Check cable for signs of possible damage or niches.
- Do not apply severe pressure or heavy weight to the heating cable or cord assembly.
- Keep volatile or combustible material away when in use.
- Keep cable away from sharp metal objects.
- Use only in approved locations.



GROUND-FAULT PROTECTION

The manufacturer and National Electrical Codes require 30-mA equipment ground-fault protection on each heating cable branch circuit to reduce the danger of re caused by continuous electrical arcing resulting from improper installation or damage to the heating cable. Conventional circuit protection may not be suitable for preventing electrical arcing.

*available when online warranty card completed within 30 days of purchase

Roof & Gutter Plug-in Self-Regulating Heater Cable

MODEL NUMBERS

6 ft	16W/120V/P/6
12 ft	16W/120V/P/12
18 ft	16W/120V/P/18
24 ft	16W/120V/P/24
50 ft	16W/120V/P/50
75 ft	16W/120V/P/75
100 ft	16W/120V/P/100

ROOF MATERIAL

Suitable for shingle, rubber/tar, wood, metal & plastic roofs

GUTTER MATERIAL

Suitable for wood, metal & plastic gutters

OUTPUT PER FOOT @ 32°F (ice/snow)

16 watts

VOLTAGE

120V

CABLE DIMENSIONS

0.42 inches x 0.22 inches
(10.7mm x 5.6mm)

MINIMUM BEND RADIUS

1.18 inches (30mm)

MAXIMUM EXPOSURE TEMP.

150°F (65°C)

CLASSIFICATION

Non-hazardous locations

