


REV. \_\_\_\_\_  
PART NUMBER: 30334008

**FEATURES:**

- AUTOMATICALLY ENERGIZES FOR USE UPON PLUG IN AND AFTER LOSS OF INPUT POWER.
- REQUIRES MANUAL RESET AFTER GROUND FAULT CONDITION.
- RAIN PROOF ENCLOSURE - IDEAL FOR OUTDOOR USE OR AROUND WET AREAS.
- NO RTV (SILICONE) REQUIRED FOR SEALING POWER CORD CONNECTION.

**SPECIFICATIONS:**

1. CLASS A GFCI, 4-6 mA TRIP LEVEL.
2. OPERATING TEMPERATURE RANGE: 15°C TO+66°C.
3. POWER "ON" INDICATION, MECHANICAL INDICATION.
4. RATING: 125 VAC, 60Hz, 15A.
5. INSULATION VOLTAGE: 1500 VRMS - 1 MIN.
6. CORD GAUGE: 12/3 AWG.
7. CONNECTIONS:  
INPUT: 3-PIN GROUNDING PLUG, NEMA 5-15P  
OUTPUT: 12/3 SJTW 60°C WITH 3x9-15R OUTLET
8. APPROVAL: UL LISTED, CSA CERTIFIED CATALOG SERIES 30334-0 TO 9
9. ENCLOSURE COLOR: YELLOW
10. U.S. PATENT NUMBER: 5757598 AND OTHER U.S. AND FOREIGN PATENTS PENDING.
11. SUFFIX = 4-C; DATE CODE --AABB (AA = WEEK, BB = YEAR).

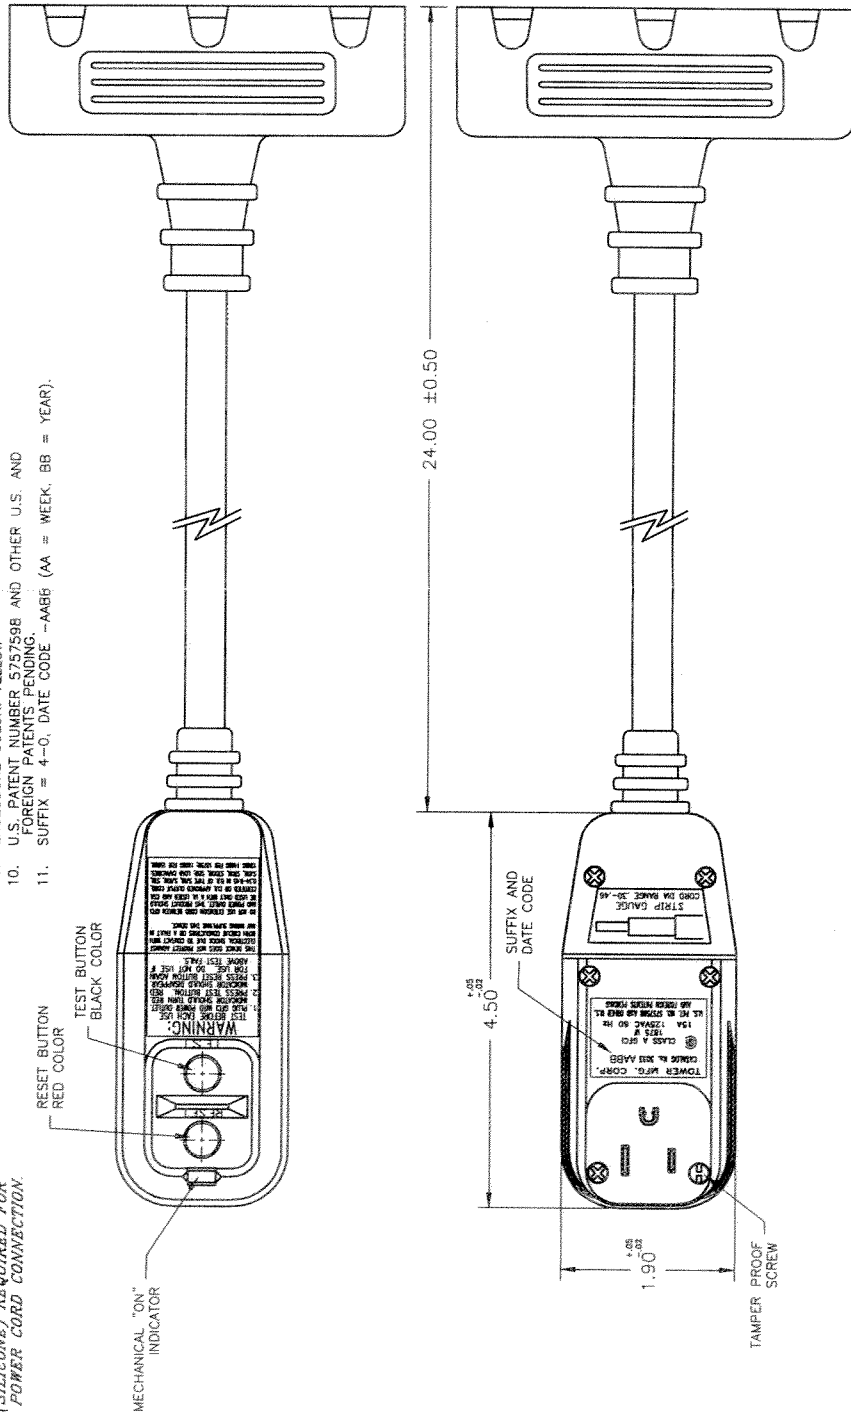

MPB 012000

<b>TOWER CONFIDENTIAL</b>		UNLESS OTHERWISE SPECIFIED:	DATE: 01-28-00	<b>TOWER MANUFACTURING CORP.</b>	
THIS DOCUMENT CONTAINS INFORMATION WHICH IS THE PROPERTY OF TOWER MANUFACTURING CORP. DISTRIBUTION, REPRODUCTION OR USE BY OTHERS IS NOT PERMITTED WITHOUT THE EXPRESSED WRITTEN CONSENT OF TOWER MANUFACTURING CORP.		XX± 020 XXX± .010 ANGLES± 1°30'	DRAWN BY: M. BALIGIAN	PROVIDENCE, RHODE ISLAND	WILE SALES: OUTLINE DRAWING SHEET 1 OF 1
<b>DO NOT SCALE DRAWING</b>		MATERIAL:	CHECKED BY: WA	CLASS A GFCI AUTOMATIC TYPE	
MPB: NEW RELEASE	ECC #00-5046	ISSUE	APPROVED BY: <i>Mac</i>	FIN. NO.	SCALE: 1:1
DATE: 01-28-00	REVISION	ISSUE	DATE: 1/31/00	PART NUMBER: 30334008	REV. _____